

(19) World Intellectual Property Organization
International Bureau



10/506842



(43) International Publication Date
18 September 2003 (18.09.2003)

PCT

(10) International Publication Number
WO 03/075778 A1

(51) International Patent Classification⁷: A61B 18/18

44114 (US). SHEKHAR, Raj [IN/US]; 280 Seiberling Drive, Sagamore Hills, OH 44067 (US). TANG, Maolong [CN/US]; 2612 Lorain Court, Columbus, OH 43210 (US).

(21) International Application Number: PCT/US03/06343

(22) International Filing Date: 28 February 2003 (28.02.2003)

(74) Agent: TUMMINO, Barry, L.; Tarolli, Sundheim, Covell & Tummino L.L.P., Suite 1111, 526 Superior Avenue, Cleveland, OH 44114 (US).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/361,474 4 March 2002 (04.03.2002) US


(71) Applicant (for all designated States except US): THE CLEVELAND CLINIC FOUNDATION [US/US]; 9500 Euclid Avenue, Cleveland, OH 44195 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR CONTROLLING ABLATION IN REFRACTIVE SURGERY

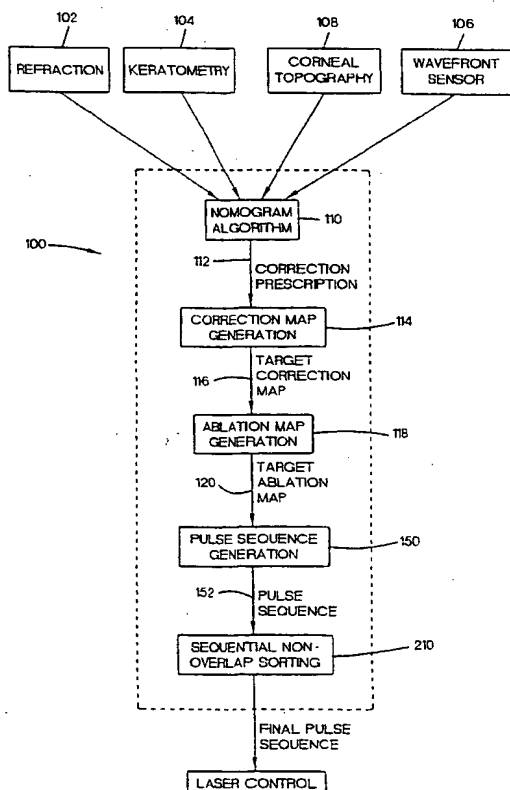

(57) Abstract: The present invention relates to laser ablation patterns to correct refractive errors of the eye (60) such as nearsightedness, farsightedness, astigmatism, and higher order aberrations of the eye (60). The laser ablation patterns used to control the laser (10) prevent induced aberrations by compensating for post-procedure epithelial smoothing. The position of laser pulses (12) is also controlled to optimize the achievement of the intended ablation pattern.



WO 03/075778 A1